# **Kent Power Bollard**





KENT STAINLESS: UTILITY BOLLARD 1



## **KENT Power Bollard**

The Kent Power Bollard KPB1050 is manufactured from Grade 316L Stainless Steel with a Bright Peened Finish as standard. The bollard stands 1050mm above ground level.

219mm is the standard diameter with 2nr 32 Amp 3 phase sockets.


This product is ideal for town centre environments, sporting arenas, shopping centres, events or anywhere temporary power may be required but depth is not available to recess power into an In Ground Power Unit.

#### Features:

- Grade 316L Stainless Steel
- Flat top with 25mm recessed reflector strip optional

### **Designed for:**

- 2nr 32 Amp 3 Phase
- Or
- 2nr 16 Amp 1 Phase

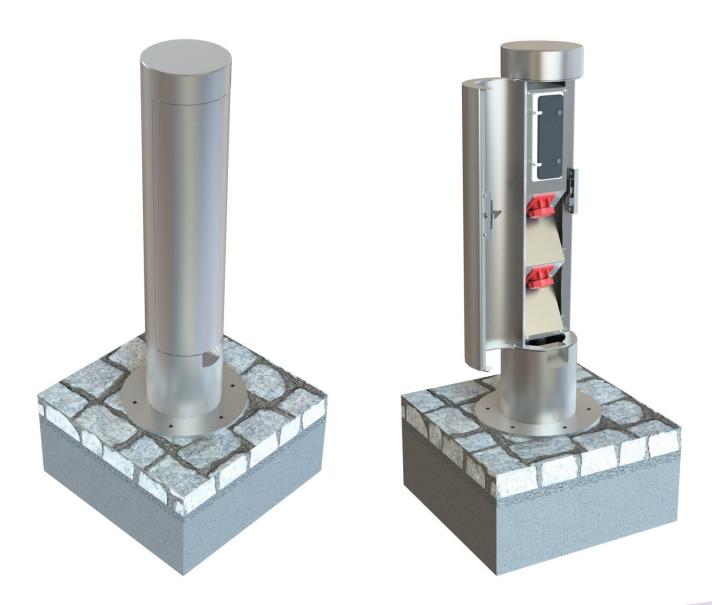



## KENT STAINLESS: UTILITY BOLLARDS 2

## **KENT Power Bollard**




Product	Diameter	Height	Sockets
KPB1050	219mm	1050mm	1/2
KPWB1200	256mm	1200mm	1/2 + Water




## **Specify**

### Specify:

Kent Power Bollard (KPB 1050); Grade 316L Stainless Steel; 1050mm Height, 219mm Dia , Bright Peened Finish, 2nr 32 Amp 3 Phase Sockets; Flat Top; Visible Flange

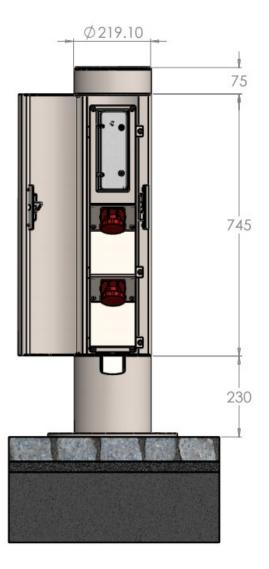

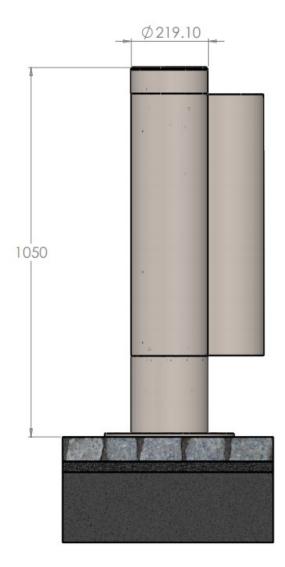



Ardcavan, Wexford, Ireland

TEL NO: UK FREEPHONE: 0800 376 8377 FAX: WEB: EMAIL:

+353 53 9143216 +353 53 9141802 www.kentstainless.com info@kentstainless.com

