

ANTI SKATE ANGLE STUD



Specify:

Kent Anti Skate Angle Stud KASA50; Grade 316L Stainless Steel; Satin finish to 320 grit polished.


The Kent Stainless Anti Skate angle Stud is constructed from 304L grade stainless steel. The external finish of the stud is satin finished to 320 grit polish. This is the perfect deterrent to skateboarding in upmarket Public realm projects.



Features

- → Satin finish to 320 grit polished
- → Grade 316L stainless steel
- ➡ Easy installation 2no. fixing points per stud
- → High quality, low cost anti skateboard stud




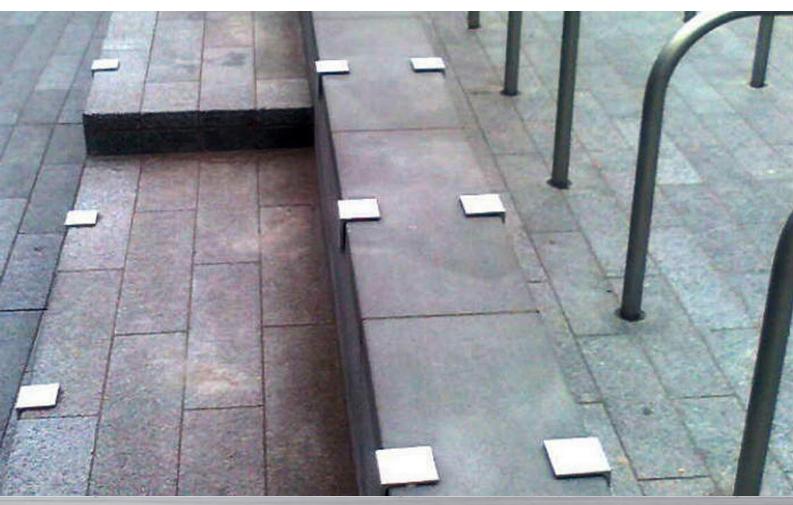




Product Dimentions:


Reference	Height	Depth	Length	Thickness
KASA50	50mm	50mm	75mm	6mm

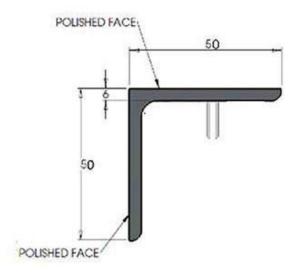

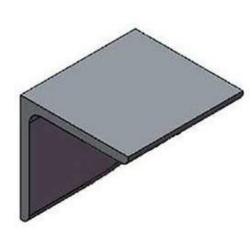

Installation:

- 1. Drill x2 10mm diameter hole by 30mm deep.
- 2. Fill with chemical mortar (Kent Stainless recommend Mungo MIT-SE Plus)
- 3. Insert the anti skate board stud and leave to set for 24 hours.

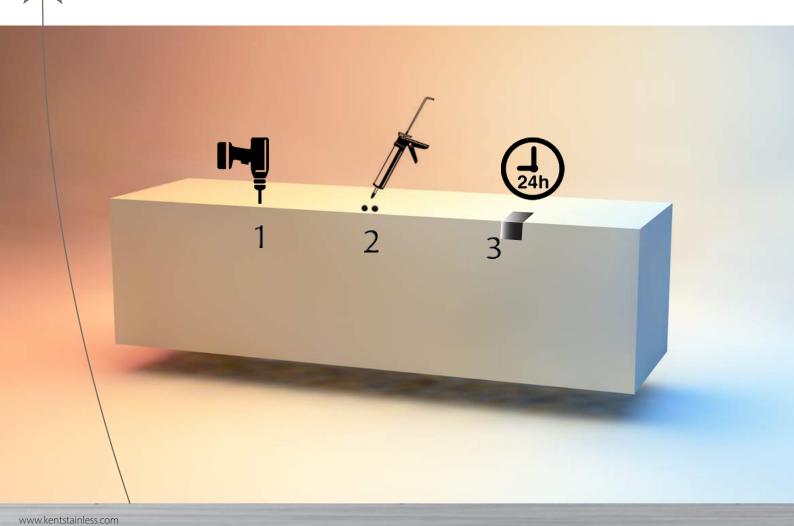


Product Options:

Specify:
Kent Anti Skate Angle Stud KASA50; Grade 316L Stainless
Steel; Satin finish to 320 grit polished.

Cold Rolled Electro Polished Satín Fínísh 320 grít Shot Peened Bright Peened

Grade 316L 304L 303

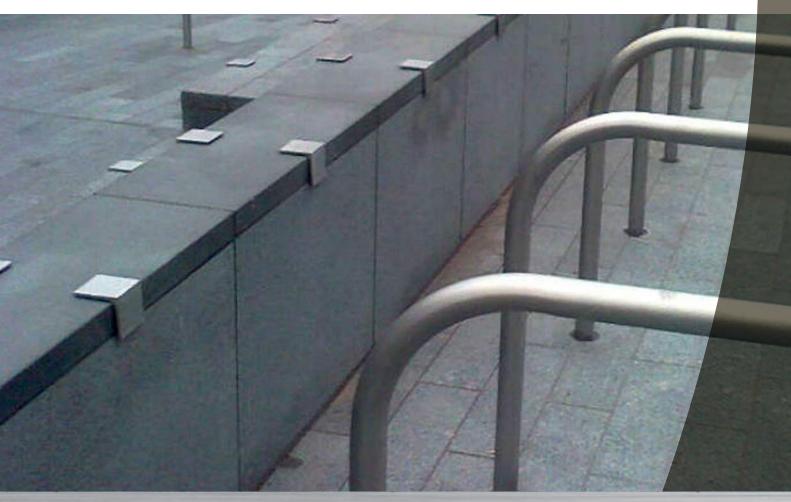

Overview

The Kent Stainless Anti Skate angle Stud is constructed from 304L grade stainless steel. The external finish of the stud is satin finished to 320 grit polish. Despite the materials corrosion resistant properties some care is required to maintain a bright appearance. The conditions that the stud is in (Inland or Coastal Area), will greatly increase its need for cleaning and care.

Maintenance

Stainless Steel:

Clean the stainless steel components using warm water with a mild detergent with a non-abrasive cloth or sponge. Heavier stains may require the use of a nylon-scouring pad or a stainless steel cleaner. To remove paint or graffiti use a cloth and Alkaline or solvent paint strippers according to type of paint. In the case of a bead blasted finish, where abrasive cleaning is required, always use a random circular rubbing action with a cloth. In the case of brushed finishes the surface consists of uniform fine 'scratches' running in one direction so where abrasive cleaning is required always use a straight back and forward rubbing action in the direction of the grain using soap and warm water. Rust spots or 'tea stains' can occur on the surface of the material, these are normally caused by contamination from ordinary mild steel, particulary inareas where construction work has been undertaken. Such stains can be removed using Rust Remover 410. In cases where the surface is severely stained because of severe environmental conditions or scratched due to misuse, it may still be possible to restore the original finishusing chemicals such as Oxalic Acid solution. There are many stainless steel polishes available to enhance the surface finish. We recommend Mister Stainless Ltd. as a provider for stainlees steel cleaning products.



