


KENT KVT162 - Commercial Gully (Pedestrian)

The KVT162 Gully is a square top stainless steel gully for tiled and poured floor areas. It is supplied as standard with a lockdown perforated grating.

Features

- Grade 304 (1.4301) or 316 (1.4401) Stainless Steel to BS EN 10088
- Satin finish as standard
- Customised perforated patterns available
- Ex stock
- Lock down as standard

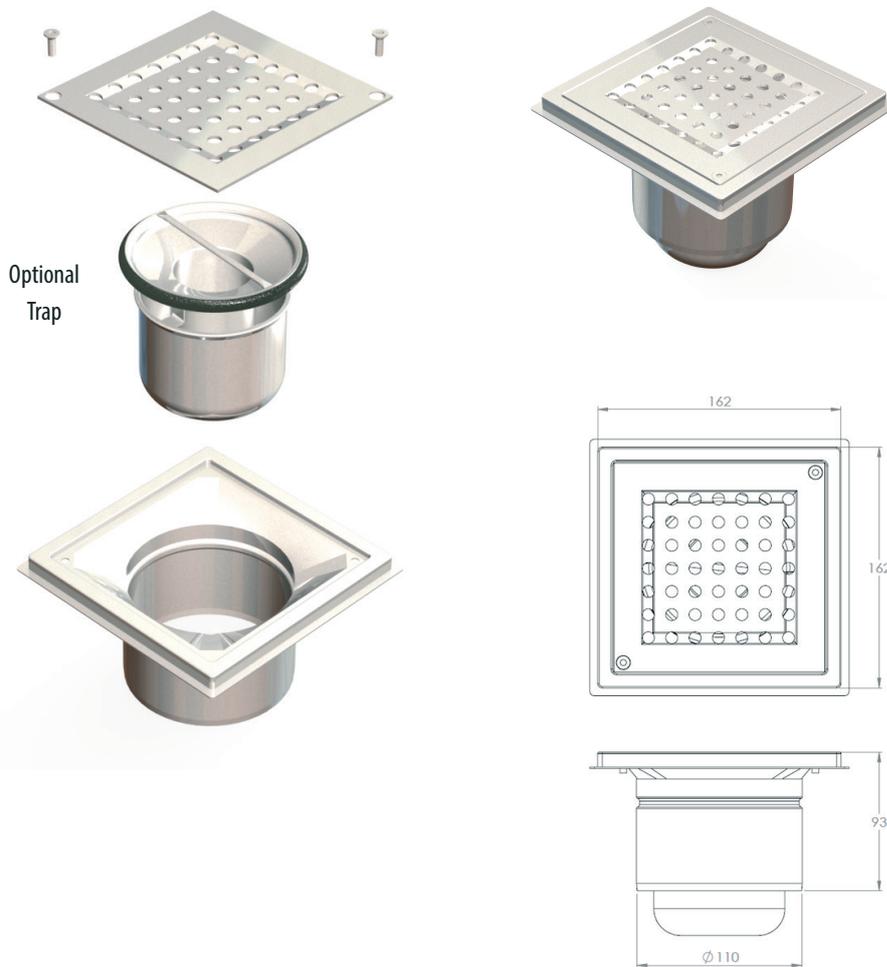

Barefoot



Pedestrian

**BS EN1253
Loading Class K3**

Product Code	Height	Width	Depth	Outlet	Flow Rate	Description
KVT162/110TP	93	162	162	110	1.4 l/s	Top Part Only Bottom Outlet 110mm
KVT162/110	200-250	162	162	110	1.4 l/s	Adjustable Height 2 Part Bottom Outlet - See Page 4
KHT162/50	140-185	162	162	50	0.9 l/s	Adjustable Height 2 Part Side Outlet 50mm - See Page 4
KHT162/1.5"BSP	140-185	162	162	1.5"BSP	0.9 l/s	Adjustable Height 2 Part Side Outlet 1.5"BSP - See Page 4
KFT110						110mm Trap with 50mm water seal

Specify Kent KVT162/110TP Floor Gully. 162mm x 162mm, fixed height floor drain. Grade 304 stainless steel with a satin polish finish, supplied with KFT110 Trap.