


KENT SOLO VENT GRILLE KSVG-600/600

The Kent Solo Vent Grille, KSVG-600/600 is a heavy duty heelproof grille which comes with an angle frame. It is generally demanded for civil landscape projects. They are manufactured in Grade 304L or Grade 316L Stainless Steel but material can be changed to Galvanised Mild Steel when required. They are manufactured in accordance with FACTA loading standards. The grilles are typically manufactured with 5mm thick bars. They feature robust laser cut lettering which is generally used to identify the utility beneath or a project logo.

These Grilles have the load bearing bars stepped down by 2mm-5mm below the surface of the transverse bars for aesthetic reasons.

Features

- ❑ Made from Grade 304L or Grade 316L Stainless Steel as standard
- ❑ 4 lifting points as standard
- ❑ Optional lockdown feature
- ❑ Typically 65% free area

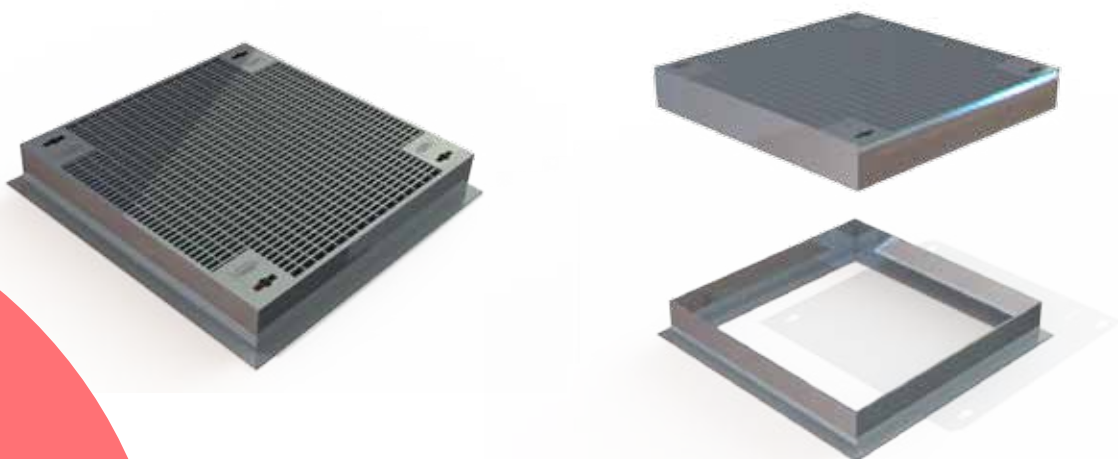


Product Code	Clear Opening	Grille Depth	Visible Frame Size
KSVG-600/600	600mm x 600mm	50-100mm	700mm x 700mm
KSVG-800/600	800mm x 600mm	50-100mm	900mm x 700mm
KSVG-800/800	800mm x 800mm	50-100mm	900mm x 900mm
KSVG-1000/600	1000mm x 600mm	50-100mm	1100mm x 700mm
KSVG-1000/800	1000mm x 800mm	50-100mm	1100mm x 900mm
KSVG-1000/1000	1000mm x 1000mm	50-100mm	1100mm x 1100mm

Specify: Kent Solo Vent Grille KSVG-600/600; 600mm x 600mm clear opening; 100mm Grille Depth; Grade 316L Stainless Steel; Loading FACTA B
See page 8 & 9 which shows how to create your own unique specification clause

Customised sizes to suit exact paving slab dimensions available in small production runs at no extra cost


Heelproof

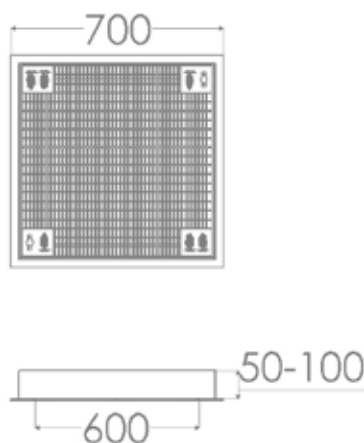Truck Loading

OPTIONS

- Various Loadings (See FACTA Table)
- Grade 304L Stainless Steel
- Grade 316L Stainless Steel
- Mild Steel Galvanised to BS EN ISO 1461 (1999)
- Galvanised to 140 Micron for Middle East projects

FACTA Class	Slow Moving Wheel Loads	Kent Safety Test (Unfilled)
A	0.6T	0.8T
AA	1.5T	3.1T
AAA	2.5T	5.2T
B	5T	10.1T
C	6.5T	13.2T
D	11T	22T